


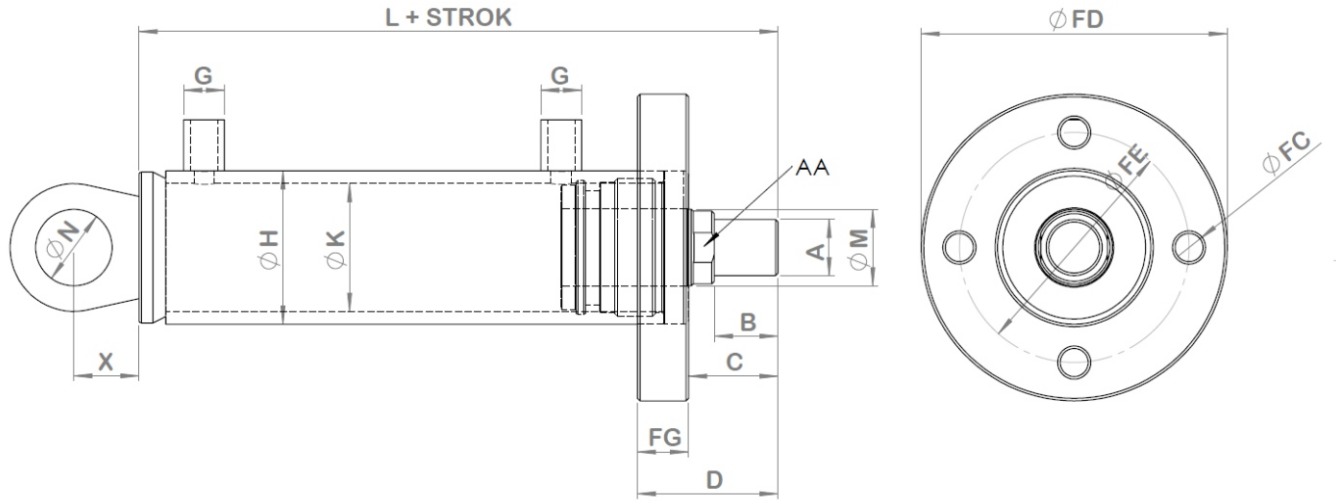

Çalışma Basıncı / Working Pressure : 160 Bar
Sıcaklık Aralığı / Temperature Range : -20°C + 90°C
Piston Hızı / Piston Speed : Max. 0.5 mt/sn.

PİSTON (K)	Ø 32	Ø 40	Ø 50	Ø 63	Ø 80	Ø 100	Ø 125
M	20	20	30	35	45	55	70
A	M16 x 1.5	M16 x 1.5	M20 x 1.5	M27 x 2.0	M33 x 2.0	M42 x 2.0	M48 x 2.0
AA	17	17	24	30	36	45	60
B	20	20	30	35	45	55	63
C	33	33	44	51	63	76	86
D	49	49	64	76	95	108	118
H	40	50	60	75	95	115	145
FC	9	9	11	13	17	22	22
G	R 1/4"	R 3/8"	R 1/2"	R 1/2"	R 1/2"	R 3/4"	R 3/4"
FE	92	106	126	145	165	200	235
FG	16	16	20	25	32	32	32
FD	110	125	148	170	195	238	272
L	133	133	147	161	193	233	248
X	38	38	45	51	69	88	100
N	20	20	25	30	40	50	60