

hydromot




BMT


HYDROMOT (BMT-BM4) Q 40 mil çap ORBİT MOTORLAR

Model		BMT-160	BMT-200	BMT-250	BMT-320	BMT-400	BMT-500
BMT-PAY		BM4-160	BM4-200	BM4-250	BM4-320	BM4-400	BM4-500
Displacement (ml/r)		148	187,1	235	295,9	374,3	535,3
	cont.	20	20	20	20	18	16
Max.Pres.Drop	int.	24	24	24	24	21	18
(Mpa)	peak.	28	28	28	28	24	21
	cont.	450	561	710	902	1008	1121
Max. Torque	int.	559	714	883	1143	1255	1377
(N.m.)	peak.	663	818	1021	1322	1431	1598
Speed. Range		10-625	9-625	8-500	7-380	6-305	5-240
(cont.) (r/min.)		100	125	125	125	125	125
Max.Flow		100	125	125	125	125	125
(cont.) (L/min.)		20,1	25,2	25,2	25,2	22	31
Max.Outpt. Power cont.(Kw)		20,3	20,8	21,4	22,4	23	24
Weight (kg)		20,3	20,8	21,4	22,4	23	24
Length (mm.)	B	12	16,5	22	29	38	56,5
	L	210	214,5	220	227	228	255
	Lw	123	128	134	141	150	168

BM4 (BMT) P Dia C2 40h7 A125 Y

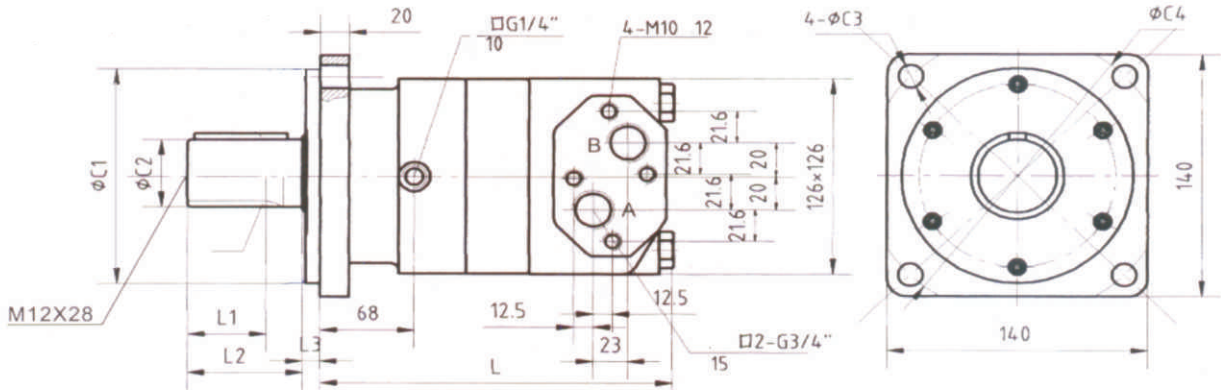

hydromot

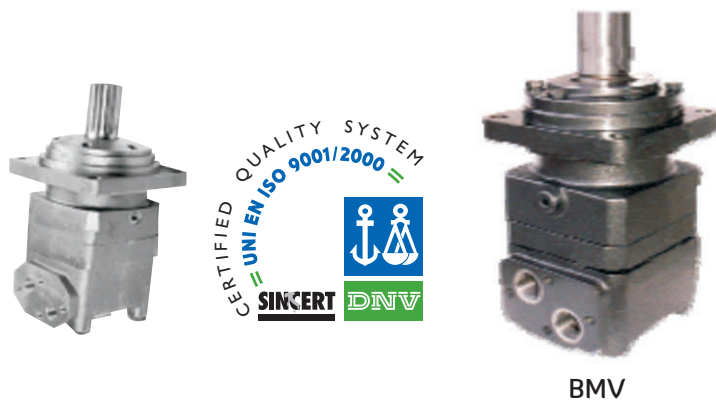

BMV

HYDROMOT (BMV-BM5) Q 50 mil çap ORBİT MOTORLAR

Model		BMV-315	BMV-400	BMV-500	BMV-630	BMV-800	BMV-985
BMV-PAY		BM5-315	BM5-400	BM5-500	BM5-630	BM5-800	BM5-985
Displacement (ml/r)		296,4	376,2	467,4	581,4	741	912
	cont.	20	20	20	18	16	14
Max.Pres.Drop	int.	24	24	24	21	18	16
(Mpa)	peak.	28	28	28	24	21	18
	cont.	873	1108	1385	1570	1773	1900
Max. Torque	int.	1119	1440	1783	1951	2122	2133
(N.m.)	peak.	1293	1650	2060	2249	2481	2399
Speed. Range		10-630	9-500	8-400	6-315	5-250	5-160
(cont.) (r/min.)		10-630	9-500	8-400	6-315	5-250	5-160
Max.Flow		200	200	200	200	200	160
(cont.) (L/min.)		200	200	200	200	200	160
Max.Output. Power		32	40	40	40	35	24
(cont.) (Kw)		32	40	40	40	35	24
Weight (kg)		30,7	31,5	32,4	33,6	35,2	37,2
Length(mm)	B	19	26	34	44	58	73
	L	211	218	226	236,5	250,5	265,5
	Lw	146	153	161	172	185	200,5

BM5 (BMV) P Dia 50h7 A160 Y

